


DiSEqC Actuator Positioner

GBOX

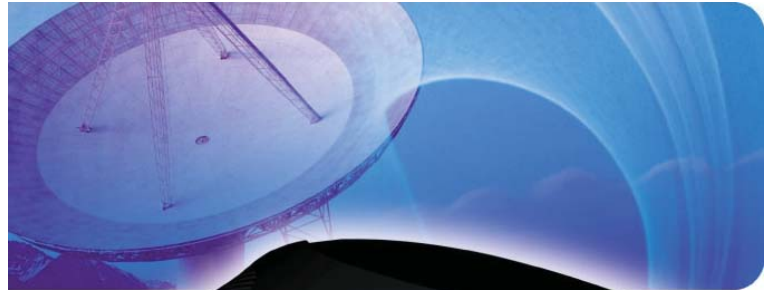

Features:

- Compatible with DiSEqC 1.2 Receivers and all kinds of Actuator Arms (Reed switch sensor)
- 99 Easily programmed positions
- 60 Pre-stored Satellite names and 30 User editable names
- 6 Digit LED Display
- 23 Key full function Remote Control
- Fine tune East / West buttons for more accurate tuning and better reception
- Recall Satellite position via 3 front panel buttons
- Incorrect wiring and short circuit protection
- Resynchronising function

99 MEMORIES V-BOX With 6 Digit LED Display

POWERTECH®

Model	V3000 Series (V-BoxII)
Main Supply Voltage	230 VAC +- ~ 10% 50Hz
Output Voltage	36 VDC
Max. Output Current	3A
Max. Power Consumption	90W
Max. Dish Diameter	3 Metre
Protocol	DiSEqC 1.2
Satellite Positions	99
Manual Buttons	Power, East / West
Display	6 Digit LED
IR Remote Control	23 Keys
Pre-stored Satellite Names	60
Protection	Software Limit & Electric Overload Protection

Name the stored satellite locations

easier than remembering just numbers.....

