




In wall, Kevlar Audio Speakers ideal for Multi Room Audio Distribution Systems or simple background music

Features:

- Flush mounted into wall
- Powder coated metal grille
- White (Outer & Grille)
- Kevlar cone
- 18oz Magnet
- 305mm x 220mm

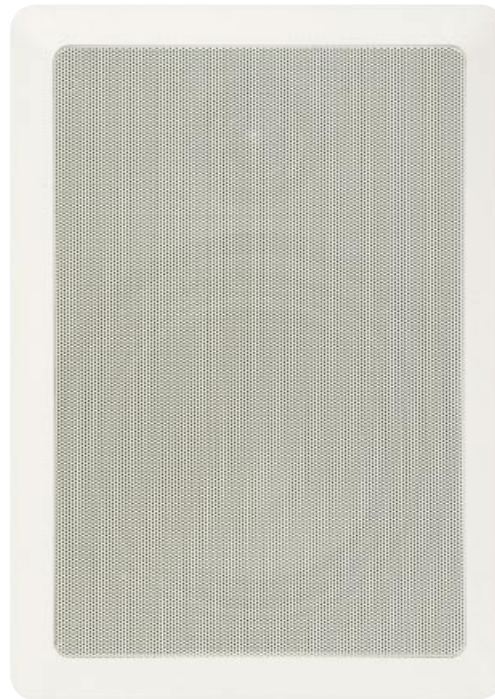

Technical Specifications:

RL-AR110	
Output RMS	60W
Impedance	8 Ohm
Drivers	Kevlar
Sensitivity	<91dB
Frequency Response	49Hz - 20Khz
Crossover	4th stage 24dB
Dimensions	305mm (h) x 220mm (w) x 90mm (d)

Related Products:

RL-MRA300	“resi-linx” Multi Room Audio Input Module with 2 balanced audio inputs to 4 zones.
Cab-SWTPHD	Speaker Cable: Transparent Outer, Figure 8 - 30 Strand 0.16mm, 100mtr Roll
Cab-SWTPXHD	Speaker Cable: Transparent Outer, Figure 8 - 40 Strand 0.16mm, 100mtr Roll